

Humidity and Temperature Sensor



KELSIUS

with SHT75 *Sensirion* Technology

Maintaining both temperature and RH at the ideal recommended specifications (specific for each storage condition or product type) during transport and storage is vitally important to maintain products in maximum condition and increase shelf life.

When the RH of the atmosphere reaches saturation (100%), water vapour will condense on the surface of the produce. The temperature at which condensation forms is called the dew point, and it is the most useful humidity parameter when dealing with condensation problems. Psychrometric charts are often used to determine the relationship between temperature, RH, and dew point.

Unwanted condensation on products may encourage disease or mould development, resulting in decay and loss of product. Condensation can also damage infrastructure, product, product labels or packaging materials.




Temperature



Radio Transmission



Humidity

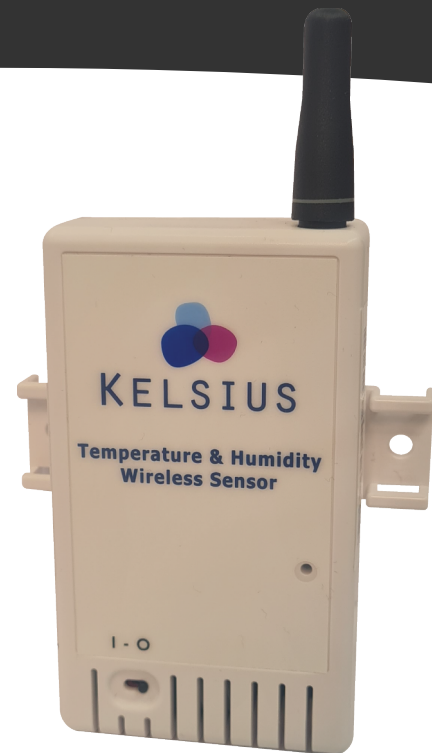

Applications:

- ✓ Healthcare & life science
- ✓ Pharmaceutical, Biomedical Engineering
- ✓ Server rooms and data centres
- ✓ Food transport, storage and distribution
- ✓ Museum & historical applications

Specification			
Product Code:	K101SH	Temperature Resolution:	0.1°C/F over full temperature measurement range
Battery Lifetime:	Greater than 5 years	RH Operating Range:	0% RH - 100% RH, non-condensing Humidity Accuracy Range ±3.0% RH from 10% RH - 90% RH
Battery Type:	LithiumTiCl 3.6V 2Ahr. AA size	Relative Humidity Resolution:	0.1% RH
Range:	100 meters. (the use of Kelsius Repeaters can allow greater distances)	Dimensions:	65mm W x 50mm H x 36mm D
Operating Range:	Humidity 0 to 100% RH Temperature -35°C to +50°C	Weight:	Approximately 80 g (2.1 oz)
Typical Accuracy:	+/- 0.2°C (1°F)	Quality Assurance Certifications:	CE, RTCA – D016ØG compliant, RoHS compliant
Accuracy Drift:	0.05°C within five years	Data Sampling Intervals:	Programmable from 30 seconds up to a maximum of 120 minutes in 30 second increments
Radio Freq Band:	915MHz (USA) 868MHz (Europe)	Programmable Alarms:	High and Low Temperature alarms, High and Low Humidity alarms
Multi Use Temperature Measurement Range:	-40°C to +123.8°C (40°F to +190.84°F)		